

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
25 March 2004 (25.03.2004)

PCT

(10) International Publication Number
WO 2004/025049 A1

(51) International Patent Classification⁷: **E04G 7/22**,
F16B 7/04

(21) International Application Number:
PCT/NL2002/000568

(22) International Filing Date: 29 August 2002 (29.08.2002)

(25) Filing Language: Dutch

(26) Publication Language: English

(71) Applicant (for all designated States except US):
VERENIGDE BEDRIJVEN VAN THIEL (VAN THIEL UNITED) B.V. [NL/NL]; Bosscheweg 38-40, NL-5741 SX Beek en Donk (NL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **VAN DEN GOOR-BERGH, Anton, Jacobus** [NL/NL]; Mathildastraat 53, NL-5901 HC Oosterhout (NL).

(74) Agent: **PRINS, A., W.**; Nieuwe Parklaan 97, NL-2587 BN Den Haag (NL).

(81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SCAFFOLD, AND GIRDER INTENDED FOR SUCH A SCAFFOLD, AND METHOD FOR BUILDING A SCAFFOLD

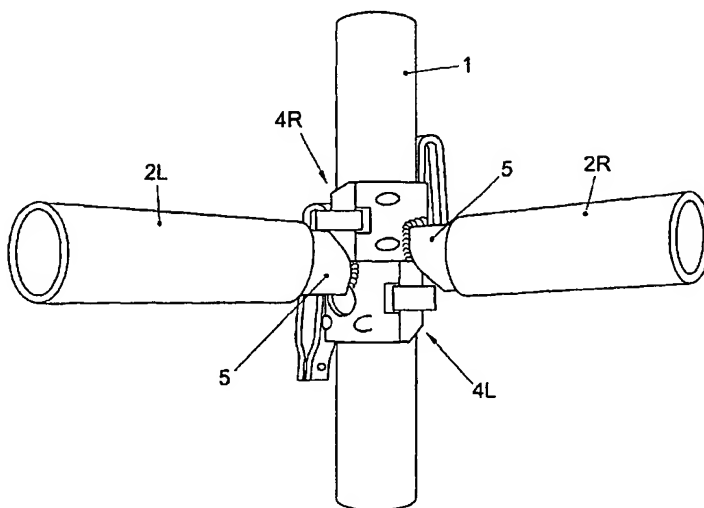

(57) Abstract: A scaffold, provided with uprights (1) and girders (2), wherein, at at least one end face (3) each girder (2) is integrally provided with a coupling means (4) for detachably coupling the girder (2) to a smooth part of an upright (1). The invention further provides a method for building a scaffold, wherein uprights (1) and girders (2) are coupled to each other, wherein at end faces (3), the girders (2) are integrally provided with coupling means (4) for coupling the girders (2) to the uprights (1), wherein a base for a scaffold floor is set up at a desired height via the following steps to be carried out in suitable order: a) uprights (1) are erected at desired positions; and b) at the desired height, girders (2) are coupled to smooth parts of the uprights (1) via the respective coupling means (4).

WO 2004/025049 A1